

TAQ MINI - (DN 6)

STAINLESS STEEL BRAIDED CONNECTORS



Faucet connectors



Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
6	10 mm	06 mm	4,7 mm	16 lit/mit at 3 bar	25 mm	10 bar	90°C


H2o potable: yes

FITTINGS

Dn	Nut G	Faucet connector M
6	3/8" 1/2"	8x1 10x1



MATERIALS

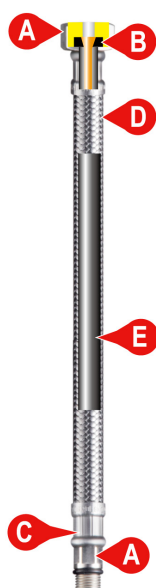

- A. Brass
- B. Incorporated EPDM
- C. Stainless steel AISI304
- D. Stainless steel wires AISI304
- E. EPDM

TAQ MINI Rev. 01