



www.tucal.com




SPECIFICATION SHEET

## TAQ PEX DN6





STAINLESS STEEL BRAIDED CONNECTOR  
SANITARY APPLICATIONS




### CHARACTERISTICS

-  Outer diameter: 10 mm
-  Inner diameter: 06 mm
-  Fitting inner diameter: 4.5 mm

### TECHNICAL SPECIFICATIONS

-  Flow rate: 16 lit/min at 3 bar
-  Minimum bending radius: 25 mm
-  Working pressure: 10 bar
-  Working temperature: 90 °C
-  H2O potable: Yes

### MATERIALS

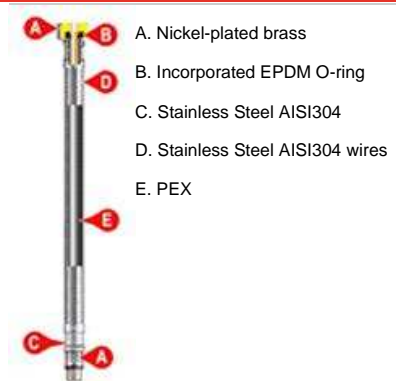

- A. Nickel-plated brass
- B. Incorporated EPDM O-ring
- C. Stainless Steel AISI304
- D. Stainless Steel AISI304 wires
- E. PEX

### FITTINGS



Nut 3/8", 1/2"



Faucet connector 8x1, 10x1

REVISION: TAQ PEX DN6 rev.0

TUCAI FLEXIBLE CONNECTING HOSES FOR WATER EFFICIENT SOLUTIONS

• [Configure](#)

Copyright © Tucal S. A. 2013 - All rights reserved