


# TAQ PEX - (DN 8)

## STAINLESS STEEL BRAIDED CONNECTORS



Sanitary and plumbing



Applications

### CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
8	12 mm	08 mm	06 mm	28 lit/mit at 3 bar	30 mm	10 bar	90°C


H2o potable: yes

### FITTINGS

Dn	Nut G	Male G	Elbow	Faucet connector M
8	3/8" 1/2"	3/8" 1/2"	3/8" 1/2"	8X1 10X1 12X1



### MATERIALS

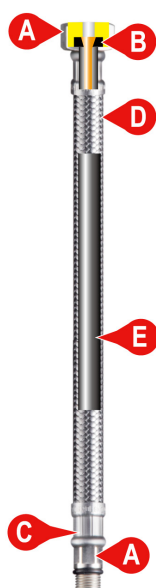

- A. Brass
- B. Incorporated EPDM
- C. Stainless steel AISI304
- D. Stainless steel wires AISI304
- E. PEX

Smooth tube	Compression	Compression
10, 15	1P	3P



TAQ PEX Rev. 01