

TAQ SUPER 15 - (DN 15)

STAINLESS STEEL BRAIDED CONNECTORS



Heaters, boilers and
air conditioning



Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
15	22 mm	15 mm	12,5 mm	95 lit/mit at 3 bar	55 mm	10 bar	90°C


F H2o potable: yes

FITTINGS

Dn	Nut G	Male G
15	1/2" 3/4"	1/2" 3/4"



MATERIALS

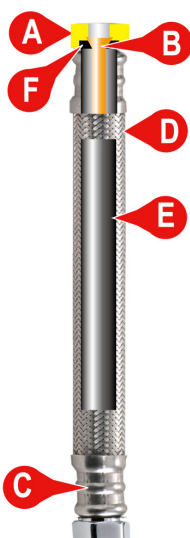

- A. Nickel-plated brass
- B. Brass
- C. Stainless steel AISI304
- D. Stainless steel wires AISI304
- E. EPDM
- F. Incorporated EPDM

TAQ SUPER 15 Rev. 01